

ASGARD BIOMASS/REFO PRICE LIST (VAT extra)



JANUARY 2011

(all prices are subject to confirmation prior to ordering)

REFO 50, 80, 120 (excluding fuel/feed silo)



Includes shunt pump, electronic control system, oxygen trim control, auger sprinkler unit, manual 4-way mixer valve for pipe work connection.

REFO 50	Boiler only	£8950.00
REFO 80	Boiler, including ash scraper/removal auger and sluice valve.	£22350.00
REFO 120	Boiler, including ash scraper/removal auger and sluice valve.	£26540.00

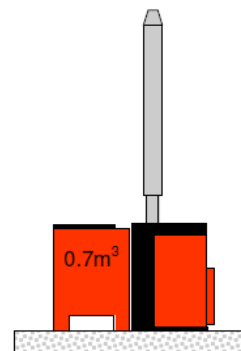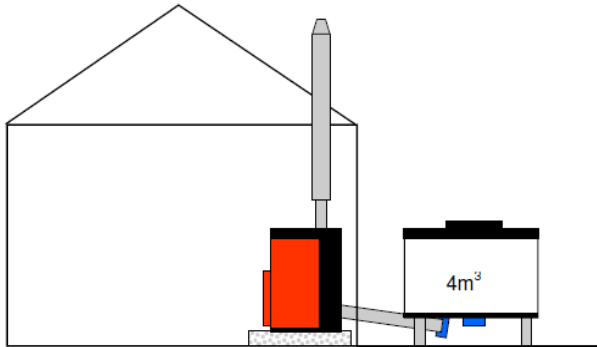

Fuel Silo/Feed Systems:


Grain only stoker, for connection to separate silo and auger	£1365.00
330 litre for grain and pellets only	£1885.00
700 litre for grain and pellets only	£2425.00
780 litre for woodchip, grain and pellets	£3570.00
4.0 cu. metre with lid, not including sluice valve	£6215.00
10.0 cu. metre silo (Open top, no lid, sluice valve required)	£6670.00
Self build silo base kits, for options see below	

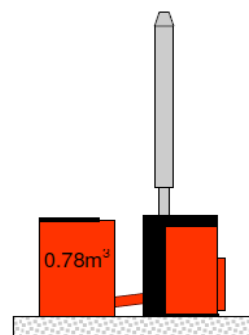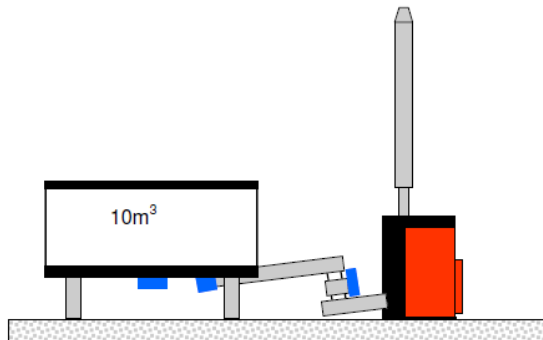

Optional extras (mainly for REFO 30, 40 and 50)

Automatic slag/ash scraper (pushes slag/ash into ash box)	£1370.00
Automatic slag/ash scraper complete with ash removal auger and bucket.	£2950.00
3-phase sluice valve with separate feed auger for fuel hopper isolation	£2850.00
1-phase sluice valve with separate feed auger for fuel hopper isolation	£3300.00
<i>If sluice valve is fitted, there is no need for lid on silo, saving</i>	<i>£660.00.</i>
Automatic control of 4-way mixer valve (used for multiple heating applications)	£194.00

Accumulator tanks are generally not required with REFO Boilers

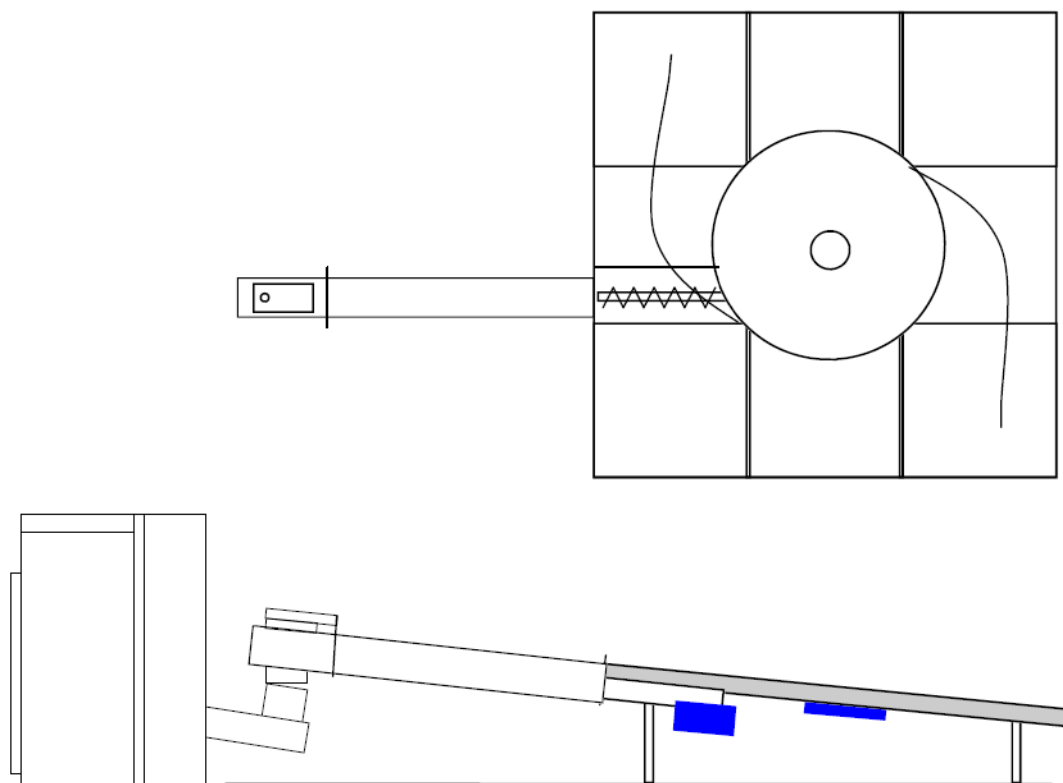

Square open base dispenser for self build silo (Approx prices subject to confirmation)
Including metal floor panels. Sluice valve required !

A.	2.35 m x 2.35 m full floor cover	£6900.00
B.	3.15 m x 3.15 m full floor cover	£9700.00
	2.35 x 2.75 part floor cover for B	£7900.00
C.	3.88 m x 3.9 m full floor cover	£11500.00
	2.35 x 3.15 part floor cover for C	£9000.00

(full floor cover made of plates 776 x 776 (and 388 x 776) - up to 36 can be used)

Replacement Stainless Steel Burner Tubes.

REFO 50	£477.00	REFO 80	£869.00
REFO 120	£1096.00	Front Plate	£77.00

All boilers are delivered pre-wired and ready for connection to the pipe work. Silo and auger are delivered in kit form and can be assembled by any competent plumber/fitter. Approximate time for 4.0 cu. metre silo is 2 men for ½ day

Site and heating system inspection/commissioning/operator training charged extra.

Delivery cost: Approx £250 - £400 plus VAT (subject to confirmation)

Chimney costs: Approx £550 - £850 plus VAT

Payment terms: 25% deposit with order.

Balance 2 weeks before despatch.

Contact Asgard Biomass Systems:

Tel: 01767 318975 Fax: 01767 601823 Mob: 07876 161442

www.asgard-biomass.co.uk